




Sanitary
flow
equipment

Quality
System
Certified
ISO 9001



TC Tubi Standard.doc
Rev.00 Page 1 of 1

Tube End Standards

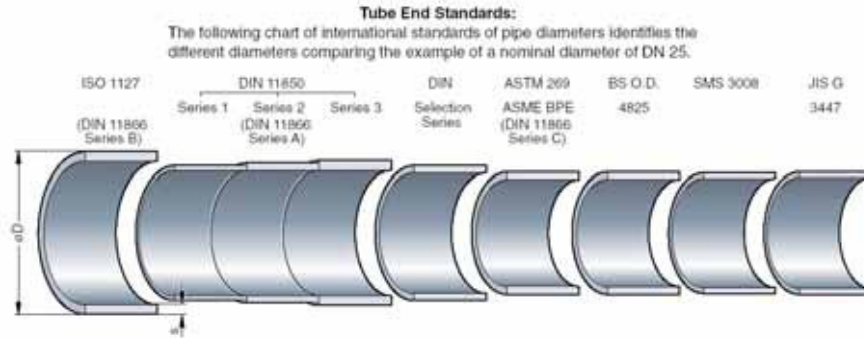

Dimensions A x B	ISO(1127)	DIN (11850)	BS-OD (ASTM.A270)	SMS (3008)	Dimensions A x B	ISO(1127)	DIN(11850)	BS-OD (ASTM.A270)	SMS(3008)
6,00 x 1,00		DIN-DN04			42,40 x 2,00	ISO-DN32			
6,35 x 1,22			DN 1/4"		48,30 x 2,00	ISO-DN40			
8,00 x 1,00		DIN-DN06		SMS-DN06	50,80 x 1,65			DN 2"	
10,00 x 1,00		DIN-DN08		SMS-DN08	51,00 x 1,20				SMS-DN50
12,00 x 1,00		DIN-DN10		SMS-DN10	53,00 x 1,50		DIN-DN50		
12,70 x 1,65			DN1/2"		60,30 x 2,00	ISO-DN50			
13,50 x 1,60	ISO-DN08				63,50 x 1,60				SMS-DN65
17,20 x 1,60	ISO-DN10				63,50 x 1,65			DN 2 1/2"	
18,00 x 1,00				SMS-DN15	70,00 x 2,00		DIN-DN65		
19,00 x 1,50		DIN-DN15			76,10 x 1,60				SMS-DN80
19,05 x 1,65			DN3/4"		76,10 x 2,00	ISO-DN65			
21,30 x 1,60	ISO-DN15				76,20 x 1,65			DN 3"	
22,00 x 1,00				SMS-DN20	85,00 x 2,00		DIN-DN80		
23,00 X 1,50		DIN-DN20			88,90 x 2,30	ISO-DN80			
25,00 x 1,20				SMS-DN25	101,60x2,00				SMS-D100
25,40 x 1,65			DN1"		101,60x2,11			DN 4"	
26,90 x 1,60	ISO-DN20				104,00x2,00		DIN-DN100		
29,00 x 1,50		DIN-DN25			114,30x2,30	ISO-DN100			
32,00 x 1,20				SMS-DN32	129,00x2,00		DIN-DN125		
33,70 x 2,00	ISO-DN25				139,70x2,30	ISO-DN125			
35,00 x 1,50		DIN-DN32			152,40x2,77			DN 6"	
38,00 x 1,20				SMS-DN40	154,00x2,00		DIN-DN150		
38,10 x 1,65			DN1 1/2"		168,30x2,60	ISO-DN150			
41,00 x 1,50		DIN-DN40			203,20x2,77			DN 8"	

High Purity Stainless Steel Tubing



SIZE	De x sp. (mm)	OD x Thk. (in.)	GAUGE	TYPE
1/4"	6,35 x 1,22	0.250 x 0.049	18 BWG	Seamless
3/8"	9,53 x 1,22	0.375 x 0.049	18 BWG	Seamless
1/2"	12,70 x 1,65	0.500 x 0.065	16 BWG	Electrowelded
3/4"	19,05 x 1,65	0.750 x 0.065	16 BWG	Electrowelded
1"	25,40 x 1,65	1.000 x 0.065	16 BWG	Electrowelded
1 1/2"	38,10 x 1,65	1.500 x 0.065	16 BWG	Electrowelded
2"	50,80 x 1,65	2.000 x 0.065	16 BWG	Electrowelded
2 1/2"	63,50 x 1,65	2.500 x 0.065	16 BWG	Electrowelded
3"	76,10 x 1,65	3.000 x 0.065	16 BWG	Electrowelded
4"	101,60 x 2,11	4.000 x 0.083	14 BWG	Electrowelded
6"	152,40 x 2,77	6.000 x 0.109	12 BWG	Electrowelded
8"	203,20 x 2,77	8.000 x 0.109	12 BWG	Electrowelded