

VRA BSP Spring check valve

Spring check valve VRA


Spring check valves VRA are realized in stainless steel AISI 316, with standard seats in PTFE and gas threaded connections.

Application

These types of valves are designed to allow the liquid to flow in one direction only, preventing reverse flow and assuring process integrity.

Advantages:

- Sterilizable – Autoclavable
- High temperature and pressure resistant

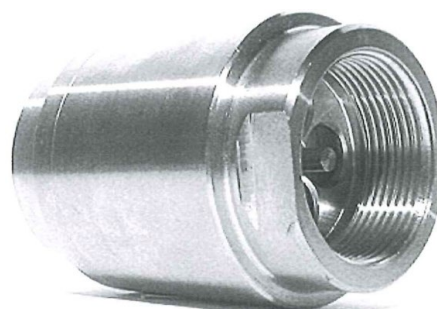

Dimensions table

CODE	INCH	DN	D	C
VRA-037MEME-00A-O	3/8"	10	25	65
VRA-050MGMG-00A-O	1/2"	15	30	66
VRA-075MHMH-00A-O	3/4"	20	36	68.5
VRA-100MJMJ-00A-O	1"	25	47.5	77
VRA-125MLML-00A-O	1 1/4"	32	51.5	89
VRA-150MMMM-00A-O	1 1/2"	40	59	98.5
VRA-200MNMN-00A-O	2"	50	72.5	102

Operating conditions:

Maximum working pressure 40 barg
Working temperature from 0°C to 150°C


Material:

1	valve body	AISI 316 stainless steel
2	guiding plate	AISI 316 stainless steel
3	spring	AISI 316 stainless steel
4	shutter	AISI 316 stainless steel
5	seat seal	PTFE

Marking:

To guarantee full traceability, following information will be marked on the valve body :

- Serial number
- code size and material grade
- indication of the flow direction



check for the last updates of this document on our website www.aerreinox.it

In the interests of development and improvement of the product, we reserve the right to change the specifications without prior notice.