

SMART CLAMP™



THE "HALF-TURN"
SANITARY SMART CLAMP

- *Faster Change Outs*
- *Half-Turn Installation*
- *Increased Uptime*
- *Ergonomic Benefits*
- *Compression Control*
- *Vibration Resistant*


Rubber Fab

a Garlock Hygienic Technologies company

Smart Clamp™

The “Half-Turn” Sanitary Clamp

Rubber Fab is proud to introduce the next generation of sanitary hinge clamps — the one-piece, completely unitized, Smart Clamp™. With features that include half-turn installation and faster uptime, the benefits of Rubber Fab’s Smart Clamp™ far exceed any other sanitary clamp.

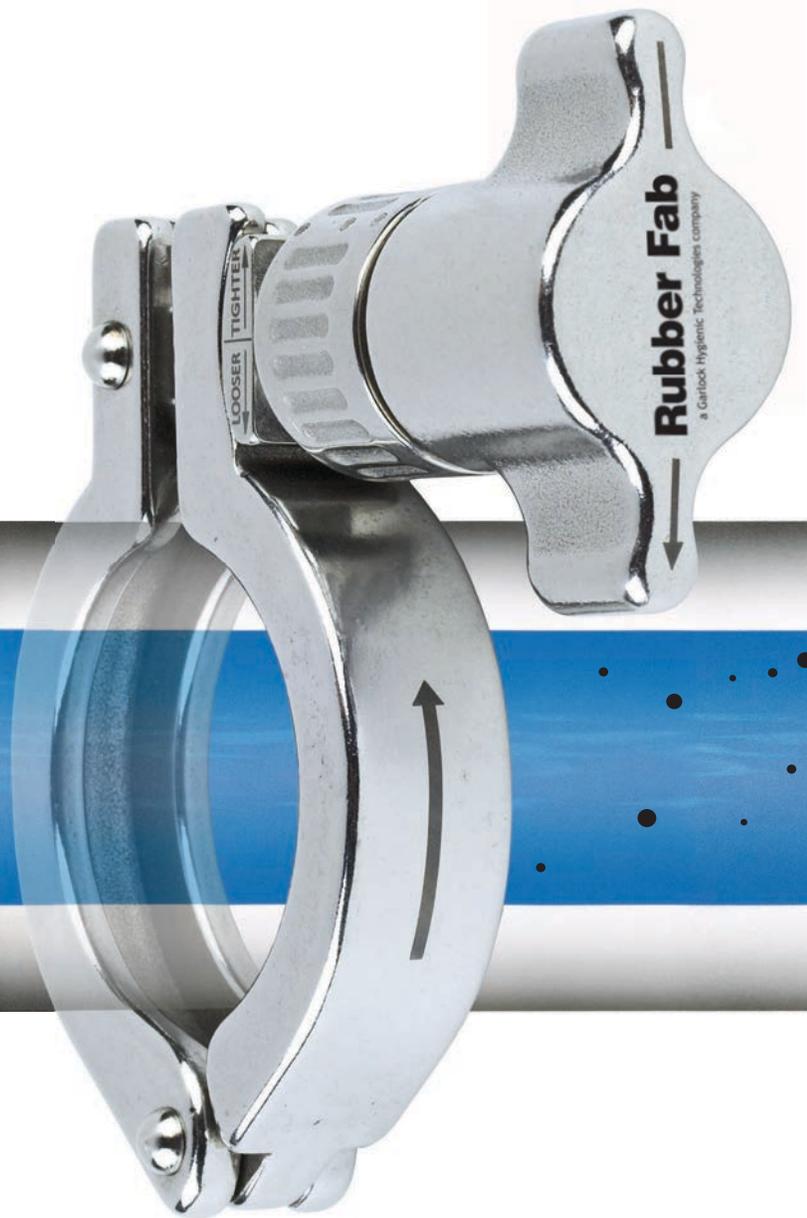

From “Up-Time” to Ergonomics


- Dramatically increased uptime
- Supports ASME-BPE seal performance
- Half-turn installation
- Repetitive stress and ergonomic benefits
- Constant and even compression across gasket face
- Multiple compression settings for sanitary gaskets – no over or under tightening of gasket
- Extends gasket’s service life
- Deeper clamp channel nests ferrules and evenly distributes force over the gasket’s face
- Single unitized unit - no additional parts
- Threadless system minimizes soil and bacterial entrapment
- Clamp hinge and locking arm will not collapse
- User-friendly
- No tools required

Maintaining a Sanitary System

One of the greatest production challenges is maintaining a sanitary system. Gaskets form an integral part of every sanitary system—for an effective seal, appropriate gasket choice, correct installation and proper compression are necessary.

Application requirements will dictate gasket choice and all tri-clamp gaskets must be seated properly within the pipe ferrules if they are to seal effectively. The application of proper torque will then provide for a substantially flush, or perfect surface, seal.

An over-tightened gasket will intrude into the pipe I.D. and lead to erosion of the gasket and contamination of the process stream. The gasket intrusion will also cause a damming effect inside the pipeline allowing soil and bacteria to collect. If additional torque is applied, the stress upon the gasket can cause tearing and additional process contamination (see A in illustration).

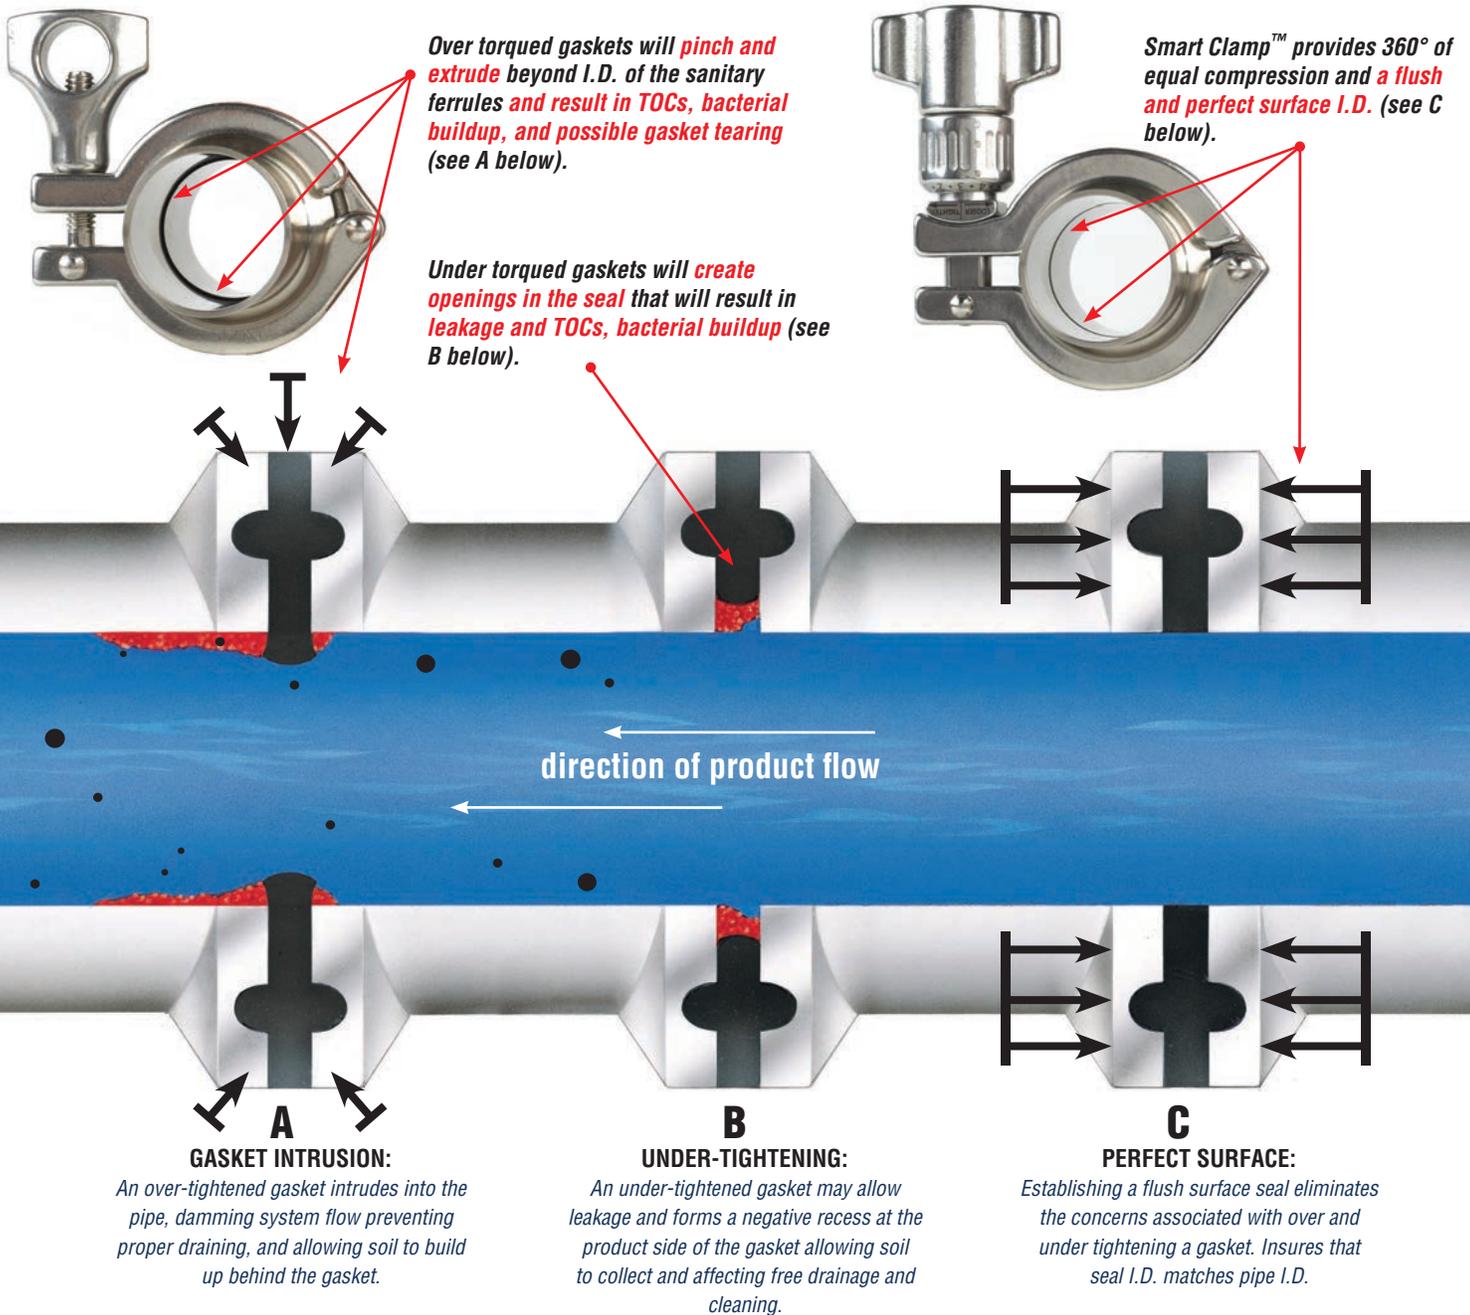

When a gasket is under-tightened, the result is a negative recess between the ferrules allowing soil and bacteria to accumulate and become entrapped (see B in illustration).

Rubber Fab's Smart Clamp™ fully supports ASME-BPE Seal Performance Standards. Smart Clamp provides accurate gasket alignment, multiple settings for proper torque, and 360° equal compression to support perfect surface results.

360° of Equal Compression

When tightened, the deep channel design of the Smart Clamp™ provides an equal amount of force onto the pipe ferrules and across the face of the gasket (see C in illustration). Unlike the top-down pinching effect associated with traditional wing-nut clamps (see A), the Smart Clamp's™

balanced compression prevents gasket I.D. intrusion and helps eliminate the stretching and tearing associated with over torqued gaskets and extending the service life of the gasket.

Multiple Settings for Multiple Gaskets

Rubber Fab understands that one gasket does not meet every system's needs. This is why the Smart Clamp™ is pre-set with multiple torque settings that have been tested and designed to work with all Rubber Fab Type I and Type II (Flanged) tri-clamp elastomeric gaskets – Tuf-Flex®, Silicone, FKM, EPDM, and Buna. Please call Rubber Fab Technical Sales with your system requirements, gasket selection and for a list of gasket user settings.

Smart Clamp™ Features

Nesting Clamp Channel

Deeper clamp channel eliminates play between the ferrules and gasket locking them together for perfect surface alignment. In fact, the Smart Clamp™ WILL NOT lock if the gasket is not properly aligned.

Unitized Clamp System

Unlike traditional clamps with a clamp and a wing nut, Smart Clamp™ is one piece for ease of use.

Easy Adjust Dial - Multiple Settings

The Smart Clamp™ quick turn dial allows for quick and accurate torque for multiple Rubber Fab gaskets.

Beveled Lip-Lock

When engaged, the Smart Clamp™ compression base seats perfectly into the beveled lip-lock securing installation and prevents disengagement if accidentally knocked or hit.

Non-Collapse Clamp

Because the Smart Clamp™ clamp will not collapse, installation is quicker and easier, especially in difficult to reach and awkward installation locations.


Ergonomic Benefits

The Smart Clamp™ “half-turn” installation not only increases uptime but decreases conditions related to repetitive stress injuries.

Quick and Easy Installation

There is no faster or easier way to install a gasket than with Rubber Fab’s Smart Clamp™ “half-turn” installation.

Smart Clamp is a one-piece unitized sanitary hinge clamp system – no parts to assemble.

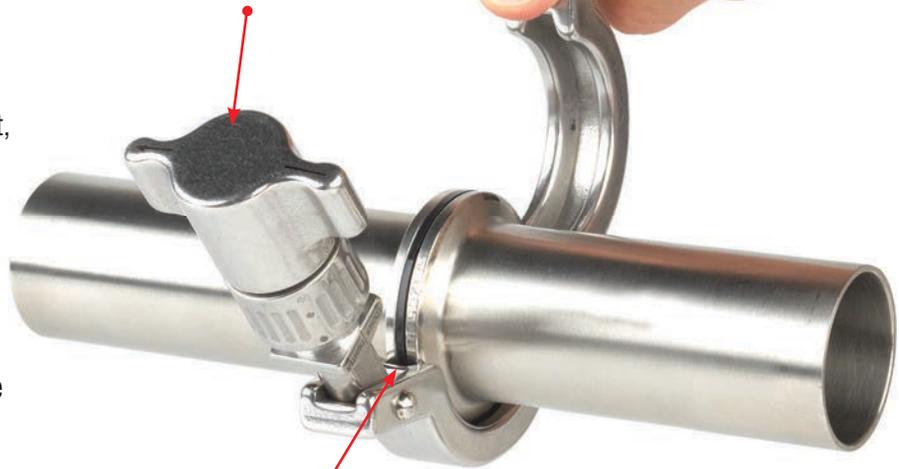

Nested ferrules and gasket are locked in place ensuring gasket alignment.

Easy adjust dial with multiple torque settings makes adjusting the Smart Clamp quick and simple.


Deeper clamp channel nests ferrules and gasket in place ensuring gasket alignment.



Visual indicator lets you know Smart Clamp is fully engaged and installed when the arrow on the clamp and the arrow on the handle are pointing to each other!

The Smart Clamp beveled lip-lock holds clamp in place if setting needs to be adjusted and in case of accidental hit.

User-friendly handle and half-turn installation helps prevent repetitive strain injury conditions.

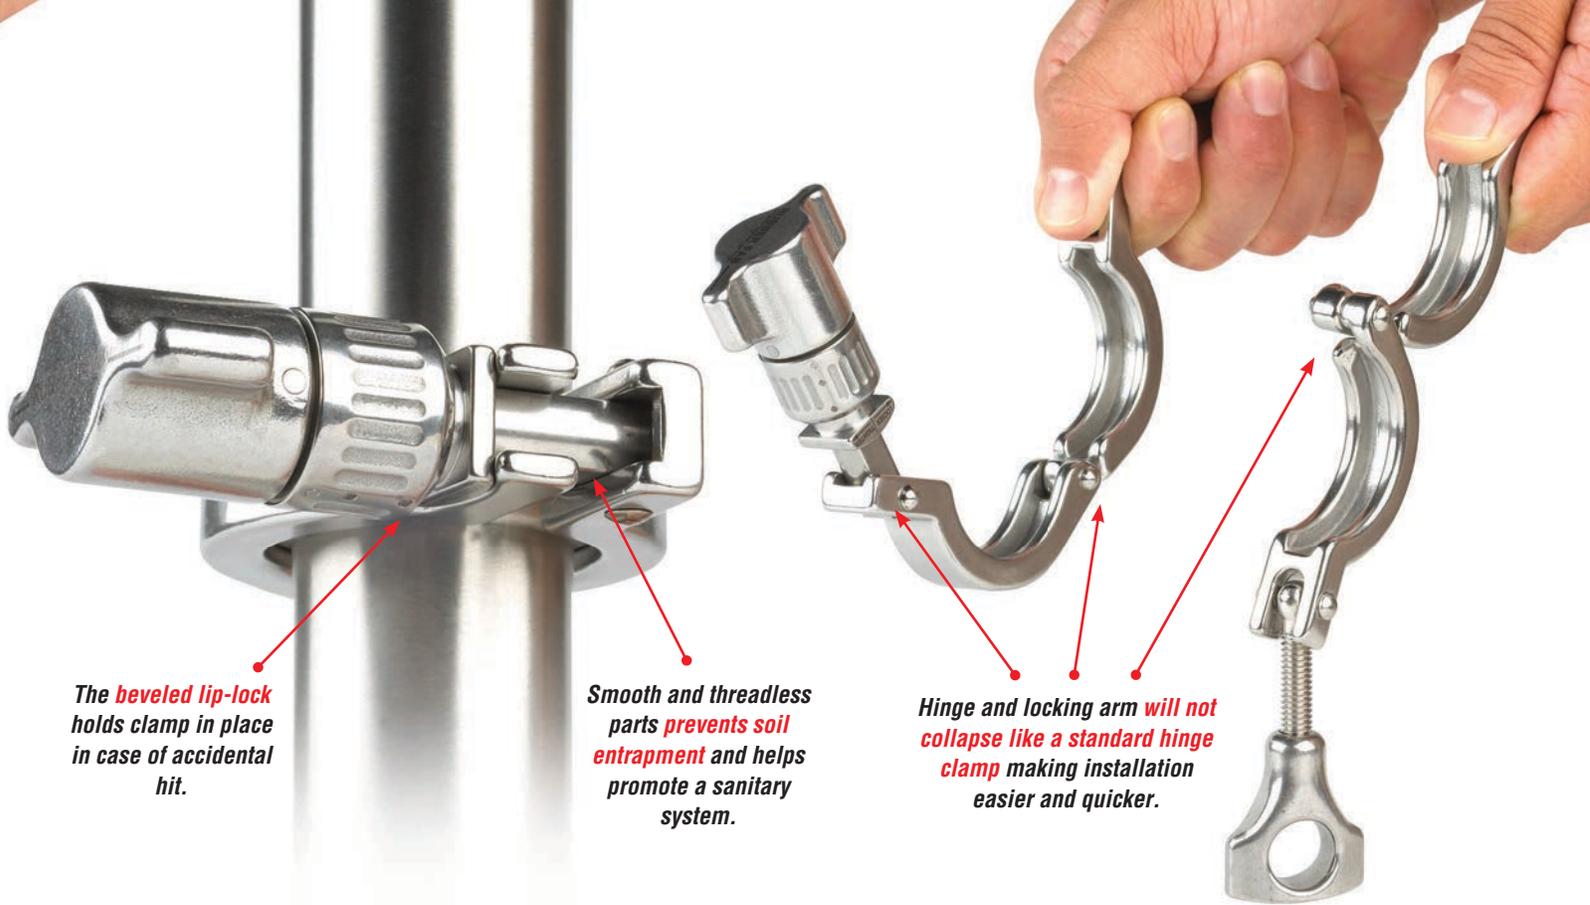


The **beveled lip-lock** holds clamp in place in case of accidental hit.

Smooth and threadless parts **prevents soil entrapment** and helps promote a sanitary system.

Hinge and locking arm **will not collapse like a standard hinge clamp** making installation easier and quicker.



Engaged Visual Indicator
You know Smart Clamp is installed when the arrows are pointing to each other!

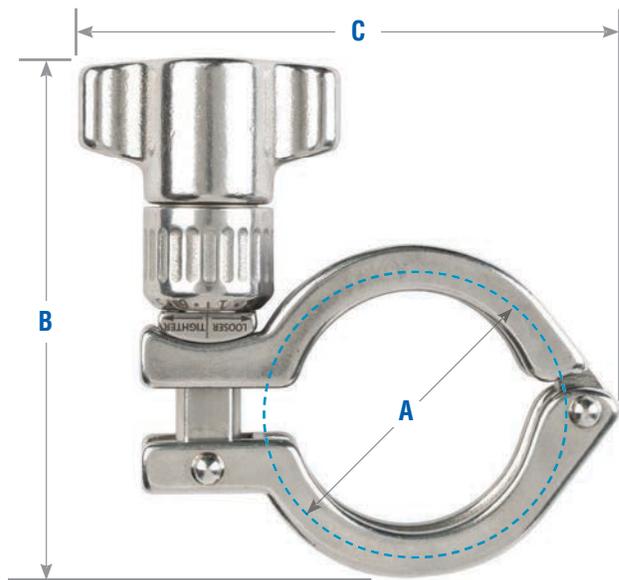

DO NOT SUBMERSE OR CLEAN WITH BLEACH
Bleach is known to be highly corrosive to stainless steel. Submersing the Smart Clamp™ can interfere with the internal mechanism

Smart Clamp™ Specifications

SIZE	Part Number	Dimension in Inches			Service Pressure Rating	
		"A"	"B"	"C"	@70°Fpsi	@250°F psi
1" & 1-1/2"	SMARTCLAMP-100/150	2.12	4.00	4.25	500	250
2"	SMARTCLAMP-200	2.65	4.50	4.75	450	250
2.5"	SMARTCLAMP-250	3.19	4.75	5.50	500	200
3"	SMARTCLAMP-300	3.71	5.00	5.75	350	150

Other sizes are in development

Don't Re-Torque...Replace

A common sign that a system is beginning to fail is when a gasket connection begins to weep. The traditional answer is to simply re-torque the clamp to try and eliminate the weepage. You "believe" you are fixing the problem, but in reality, you are creating a far worse situation by pushing the gasket beyond its limits. Smart Clamp™ provides proper torque from the moment of install.

Another common reason for re-torquing is when a connection becomes loose. In systems with harmonic vibrations there is a concern that traditional wing-nut clamps will become loose. Smart Clamp™ has successfully been tested to withstand mechanical vibrations inherent in systems with pumps and other repetitive vibration prone equipment.



Sealing surface, because of over compression, intrudes into sanitary tube I.D. obstructing flow, knocking off particles and contaminating product

Tears and rips from over compression

SAFETY SMART: Smart Clamp™ is Designed to Help Prevent and Decrease Repetitive Strain Injury Conditions

Repetitive Strain Injury (RSI) (also known as repetitive stress injury, repetitive motion injury, repetitive motion disorder (RMD), occupational overuse syndrome, and regional musculoskeletal disorder) is an injury of the musculoskeletal and nervous systems that can be caused by repetitive tasks, forceful exertions, vibrations, mechanical compression (pressing against hard surfaces), or sustained or awkward positions.

Repeating such motions, multiple times, during the course of normal work or other daily activities can result in repetitive motion disorders.

Smart Clamp™ is designed to address these RSI workplace conditions and job demands to the capabilities of the working population. Effective and successful "fits," or fixes, assure high productivity, avoidance of illness and injury risks, workman's comp claims, and increased protection among the workforce.

Common examples of RSI are:

- Carpal Tunnel Syndrome
- Tendonitis
- Bursitis
- Tennis Elbow
- Trigger Finger



The Smart Clamp ergonomic design and "half-turn" installation decreases working conditions that are known to result in Repetitive Stress Injury

Smart Clamp™ “Half-Turn” Installation

It doesn't get any easier or faster than the half-turn installation of the Rubber Fab Smart Clamp™. In highly repetitive use industries such as pharmaceutical and bio-pharmaceutical manufacturing plants, pilot plant facilities, SKIDs or where the use of transfer panels, hose to tank, and SOPs are common place, time is money — faster is better! Using a filtration system of orifice plates and screens? Get faster up-time! Clean out backed up screens and have your system up and running faster.




Making Tough Spots Easy

Having trouble with installations in tough or awkward conditions and positions? Under tanks? Over head? In a corner? Rupture discs? Smart Clamp™ can help. With a hinge that doesn't collapse, Smart Clamp™ can easily be positioned and controlled around tough installation locations. The deeper clamp channel allows the ferrules and gasket to properly nest together ensuring proper alignment. And because the Smart Clamp™ will not close unless the gasket is properly aligned, you can have confidence that installation is correct in all spots.


Smart Clamp™ Installation



Standard Clamp Installation

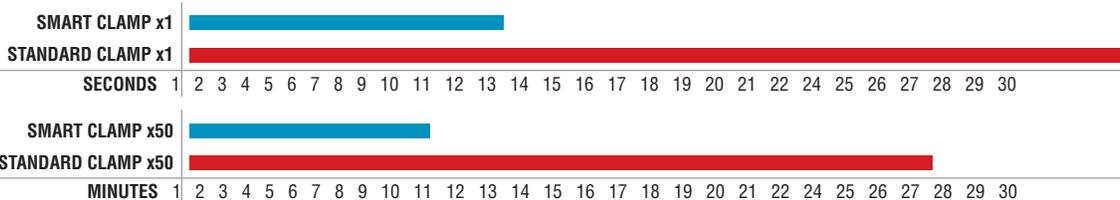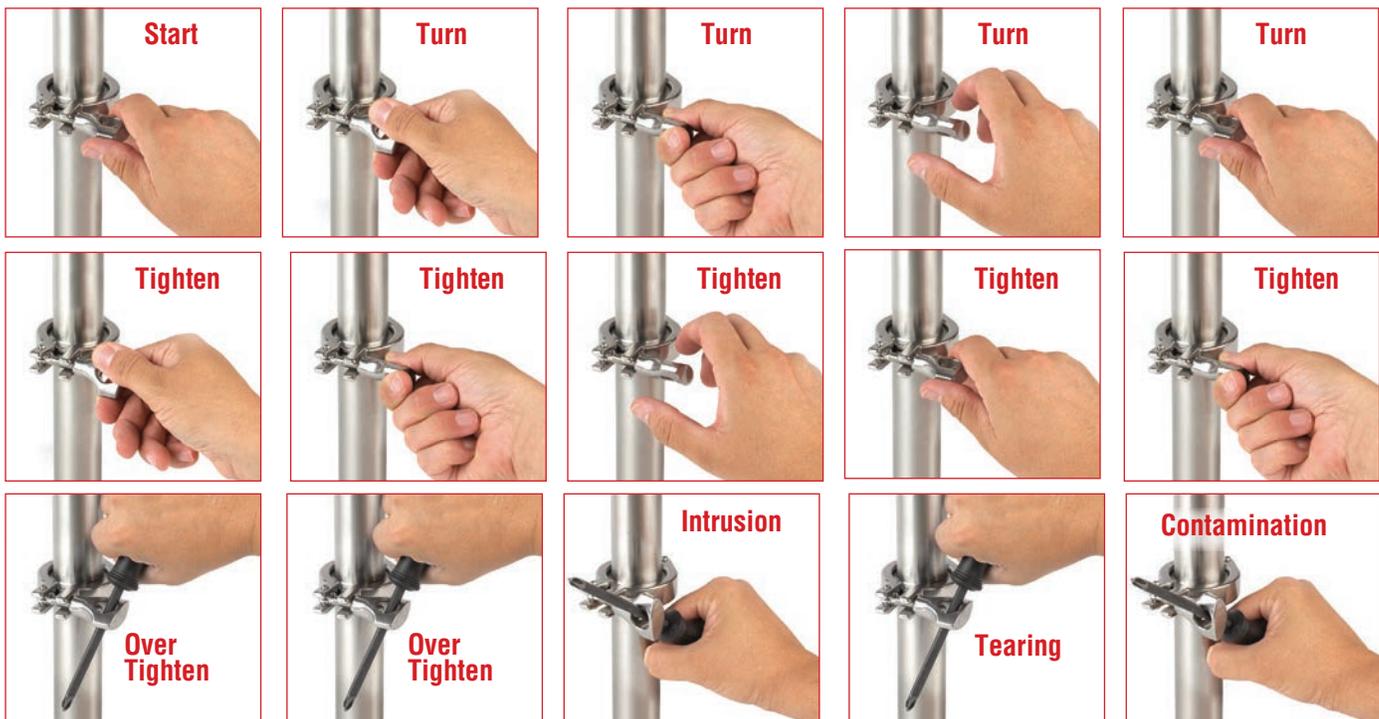

Time is based on typical gasket change out. Time is to open clamp, change out gasket, and close clamp. For this demonstration, ten seconds are included to each gasket change out. Smart Clamp may not be effective in severely worn or pitted ferrules or with severely degraded gaskets

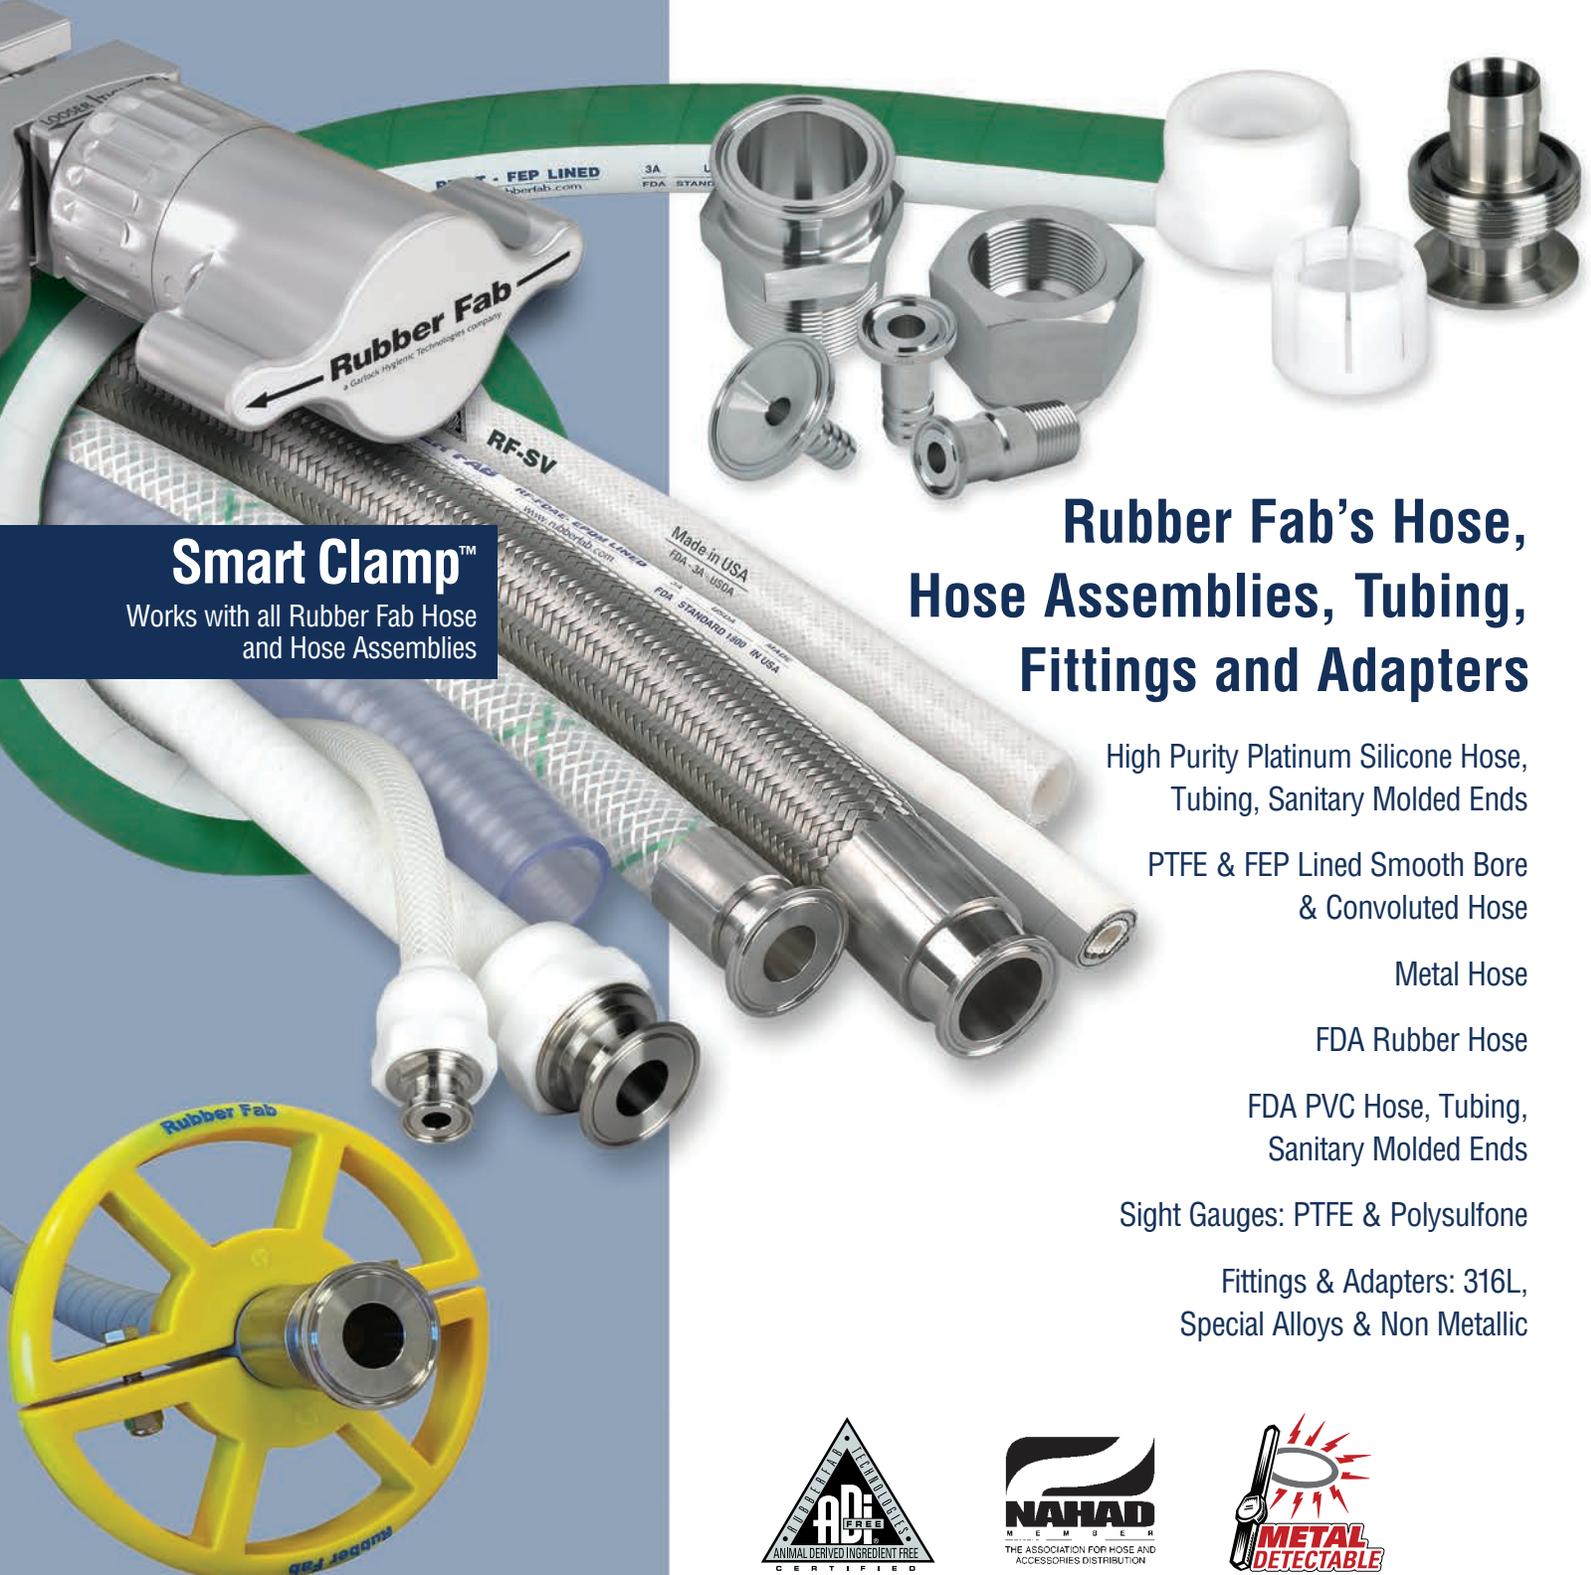

Smart Clamp™
Works with all Rubber Fab Hose and Hose Assemblies

Rubber Fab's Hose, Hose Assemblies, Tubing, Fittings and Adapters

- High Purity Platinum Silicone Hose, Tubing, Sanitary Molded Ends
- PTFE & FEP Lined Smooth Bore & Convolute Hose
- Metal Hose
- FDA Rubber Hose
- FDA PVC Hose, Tubing, Sanitary Molded Ends
- Sight Gauges: PTFE & Polysulfone
- Fittings & Adapters: 316L, Special Alloys & Non Metallic

Rubber Fab
a Garlock Hygienic Technologies company

26 Brookfield Drive • Sparta, NJ 07871
phone: 973-579-2959 • fax: 973-579-7275

www.rubberfab.com

™ Smart Clamp is a trademark
© Tuf-Flex is a registered trademark of Rubber Fab
© Tri-Clamp is a registered trademark of The Ladish Co.
Smart Clamp™ patent #8,220,113



Rubber Fab is a member of:



Distributed by: