

VRA BSP Spring check valve

Spring check valve VRA

Spring check valves VRA are realized in two pieces machined from solid round bar in stainless steel AISI 316L, assembled with a standard gas threaded.

In the standard version the seats are in PTFE.

Suitable for horizontal or vertical in-line position.


(fully drainable in both execution).

Application

The sanitary spring check valves can be easily and quickly dismantled and reassembled without tools and are appreciated in chemicals, food, beverage and dairy process.

Advantages:

- Sterilizable – Autoclavable
- High temperature and pressure resistant

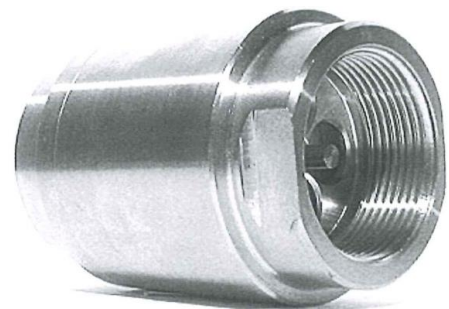

Dimensions table

CODE	INCH	DN	OD	Lenght
VRA-025MCMC-00A-O	1/4"	8	25	60
VRA-037MEME-00A-O	3/8"	10	28	65
VRA-050MGMG-00A-O	1/2"	15	35	80
VRA-075MHMH-00A-O	3/4"	20	42	80
VRA-100MJMJ-00A-O	1"	25	52	90
VRA-125MLML-00A-O	1"1/4	32	55	95
VRA-150MMMM-00A-O	1"1/2	40	65	110
VRA-200MNMN-00A-O	2"	50	80	118

Operating conditions:

Opening pressure	2 barg
Maximum working pressure	40 barg
Working temperature	from 0°C to 150°C


Material:

1	valve body	AISI 316L stainless steel
2	guiding plate	AISI 316L stainless steel
3	spring	AISI 316L stainless steel
4	shutter	AISI 316L stainless steel
5	seat seal	PTFE

Marking:

To guarantee full traceability, following information will permanently be marked on the valve body :

- AR logo (identif. constructor)
- code size and material grade
- indication of the flow direction



check for the last updates of this document on our website www.aerreinox.it

In the interests of development and improvement of the product, we reserve the right to change the specifications without prior notice.